

(19) World Intellectual Property  
Organization  
International Bureau



553795

(43) International Publication Date  
4 November 2004 (04.11.2004)


PCT

(10) International Publication Number  
**WO 2004/094772 A1**

- (51) International Patent Classification<sup>7</sup>: **E21B 10/28**, 7/28, E21D 9/10
- (21) International Application Number: **PCT/SE2004/000551**
- (22) International Filing Date: **7 April 2004 (07.04.2004)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:  
**0301167-3** **22 April 2003 (22.04.2003)** **SE**
- (71) Applicant (for all designated States except US): **ATLAS COPCO SECOROC AB [SE/SE]**; Box 521, S-737 25 FAGERSTA (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **HOLMGREN, Lars** [SE/SE]; Pilgatan 14, S-733 37 Sala (SE).
- (74) Agents: **KARLSTRÖM, Lennart et al.; NORÉNS PATENTBYRÅ AB**, Box 10198, S-100 55 STOCKHOLM (SE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,

[Continued on next page]

(54) Title: **A ROCK DRILL BIT ASSEMBLY**

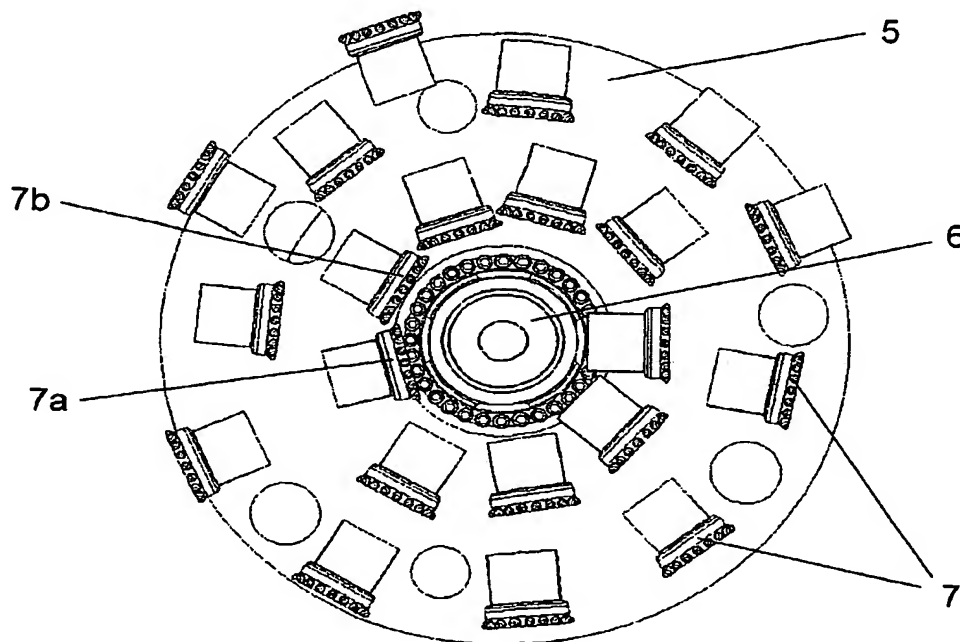

(57) Abstract: A drill bit assembly for direct removal of rock by means of a rotatable bit assembly (5) that includes a plurality of cutters or choppers (7). According to the invention, a number of cutters (7) are so disposed in relation to each other on the bit assembly (5) that a subsequent cutter (7b), seen in the direction of rotation, will engage an edge created by the action of a preceding cutter (7a).

WO 2004/094772 A1



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*